


## Gear Pumps LTH UNI D.22

We are glad to inform you that our gear pumps range now will include also the following group **LTH UNI D.22**.

### LTH UNI D.22

Reversible pumps for medium applications, cast iron body from 61 to 125 cm<sup>3</sup> and shaft D.22.

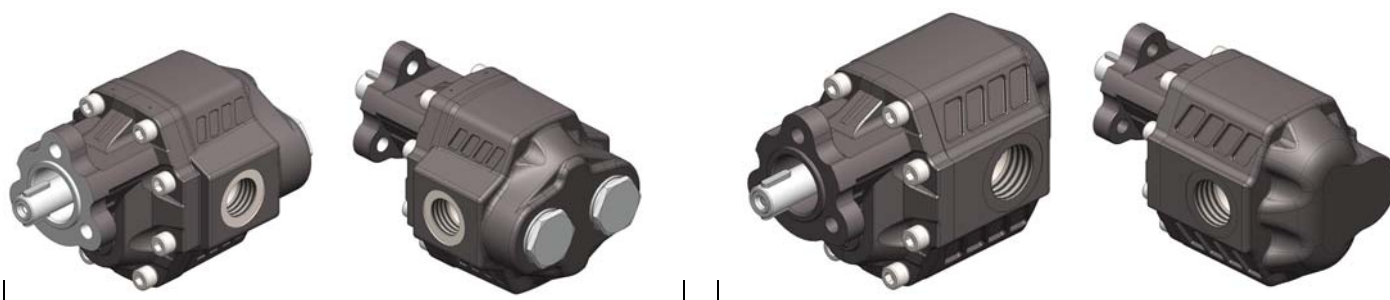

**Displacement 61-73-82**

**Displacement 100-125**

Pump type	Displacement cm <sup>3</sup> /rev	Order code	IN ISO 228	OUT ISO 228	Pressure			Max. continuous speed rpm	Max. intermittent speed rpm	Min. speed rpm
					P1 bar	P2 bar	P3 bar			
<b>LTH-61</b>	60,06	10502880616	G 1	G 1	150	-	-	1900	2500	300
<b>LTH-73</b>	72,88	10502880730			125	-	-			
<b>LTH-82</b>	90,43	10502880821			100	-	-			
<b>LTH-100</b>	98,18	10502881008	G 1-1/4	G 1-1/4	90	-	-	1400	1700	
<b>LTH-125</b>	122,72	10502881259			70	-	-			

P1=Max. continuous pressure (100%)  
P2=Max. Intermittent pressure (20 sec.max.)  
P3=Max. peak pressure (6 sec.max)

For any information you may need, please contact export department.